


DESCRIPTION

Ground support made of SBR (Stirene Butadiene Rubber) compound quipped with profile set on it ensured through an innovative fusion system.

DIMENSION

TYPE	MEASURE		TOLERANCE
A	mm	130	± 2
B	mm	110	± 2
C	mm	100	± 2
D	mm	86	± 2
E	mm	23	± 2
F	mm	95	± 3
H	mm	400 602	- 0 +5
Weight	Kg/m	8,70	$\pm 0,5$ kg/m

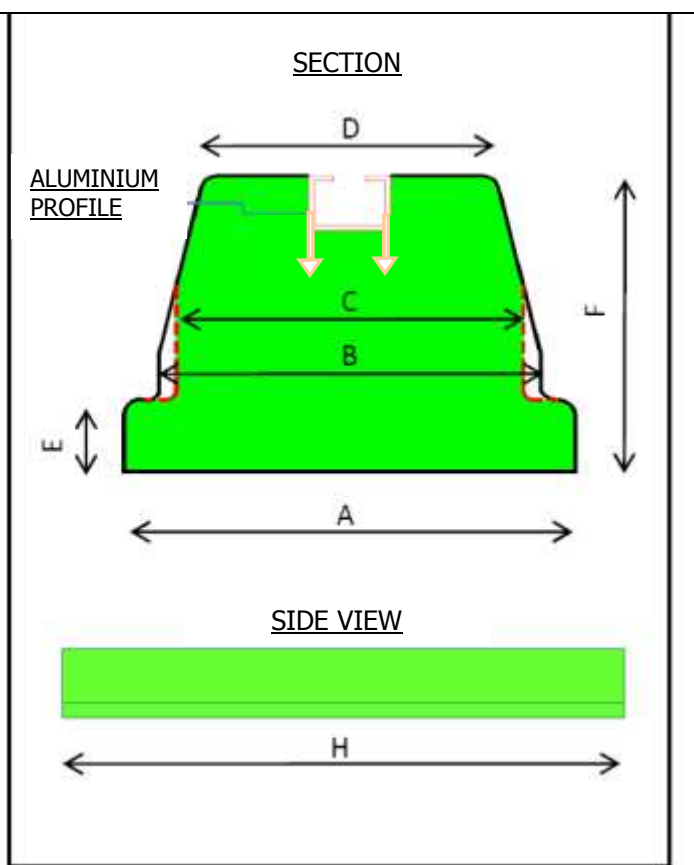

Aluminium Profile 20x15 mm



Code	(L x H x W)	LOAD CAPACITY
400mm	400x95x130 mm	200 + 200
600mm	600x95x130 mm	500 + 500

RAW MATERIAL

SBR rubber grain (recycled rubber)

Neutral polyurethane adesive

Aluminium profile

ACCESSORIES

Kit **C-932** (for 20x15 profile) supplied with: **4 screws M10x25 / 4 nuts M10 / 4 washers M10x20**