


MULTI V – kanálové jednotky středotlaké

Statický externí tlak + množství vzduchu

ARNU28~36GM2A4

Postup stanovení množství vzduchu viz předchozí strany.

SV (Setting Value)	Static Pressure (mmAq(Pa))							
	4(39)	6(59)	8(78)	10(98)	12(118)	14(137)	16(157)	18(176)
Air Flow Rate (m³/min)								
65	4.7	-	-	-	-	-	-	-
70	10.3	-	-	-	-	-	-	-
75	15.0	-	-	-	-	-	-	-
80	19.0	7.6	-	-	-	-	-	-
85	24.9	13.8	4.9	-	-	-	-	-
90	27.6	20.4	7.8	-	-	-	-	-
95	30.4	24.4	15.7	5.15	-	-	-	-
100	33.1	28.7	20.8	9.21	3.82	-	-	-
105	35.9	31.7	24.1	17.5	6.73	-	-	-
110	38.6	34.7	30.5	22.2	11.5	5.52	-	-
115	40.1	37.8	33.8	27.9	20.2	9.10	-	-
120	-	39.1	37.1	31.4	24.6	17.9	7.45	-
125	-	-	38.5	35.0	30.1	21.2	11.01	6.65
130	-	-	-	37.1	32.0	27.6	15.61	10.00
135	-	-	-	-	36.8	31.53	24.27	16.19
140	-	-	-	-	40.5	35.88	29.79	22.43
145	-	-	-	-	-	39.86	34.92	27.75
150	-	-	-	-	-	-	39.40	34.18
155	-	-	-	-	-	-	-	37.09

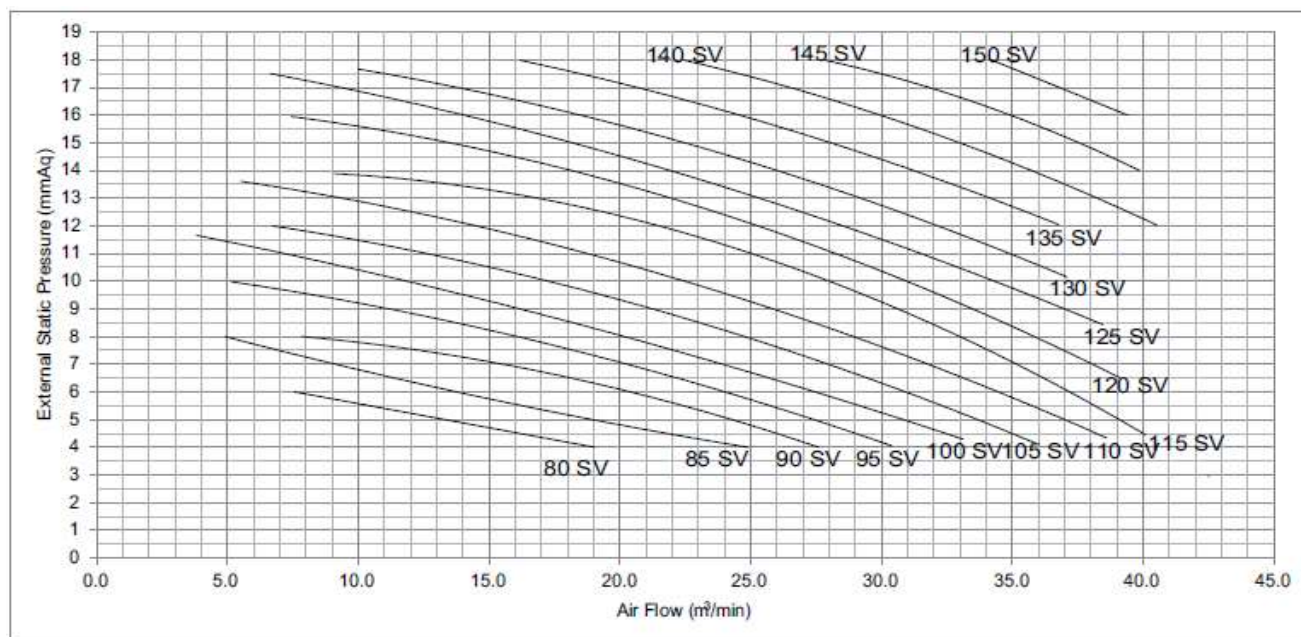

Setting value (SV) = nastavená hodnota na dálkovém ovladači

Static Pressure = ext. statický tlak (mm vod. sloupce / Pa)

Hodnoty množství vzduchu jsou uváděny v m³/min (Air Flow / CMM)