


## MULTI V – kanálové jednotky středotlaké

### Statický externí tlak + množství vzduchu

#### ARNU48~54GM3A4

Postup stanovení množství vzduchu viz předchozí strany.

SV (Setting Value)	Static Pressure (mmAq(Pa))							
	4(39)	5(49)	6(59)	8(78)	10(98)	12(118)	14(137)	15(147)
Air Flow Rate (m³/min)								
70	25.2	25.1	-	-	-	-	-	-
75	30.4	29.5	26.1	-	-	-	-	-
80	35.0	34.0	30.8	25.9	-	-	-	-
85	40.0	38.4	35.4	30.6	23.2	-	-	-
90	44.3	42.9	40.1	35.2	28.1	21.0	-	-
95	49.3	47.3	44.8	39.9	33.1	26.3	19.5	-
100	53.0	51.8	49.4	44.6	38.0	31.7	25.2	22.6
105	57.2	56.2	54.1	49.2	43.0	37.1	31.0	28.5
110	-	-	58.8	53.9	47.9	42.4	36.7	34.4
115	-	-	-	58.6	52.9	47.8	42.5	40.3
120	-	-	-	-	57.8	53.1	48.2	46.1
125	-	-	-	-	-	54.2	49.4	47.3

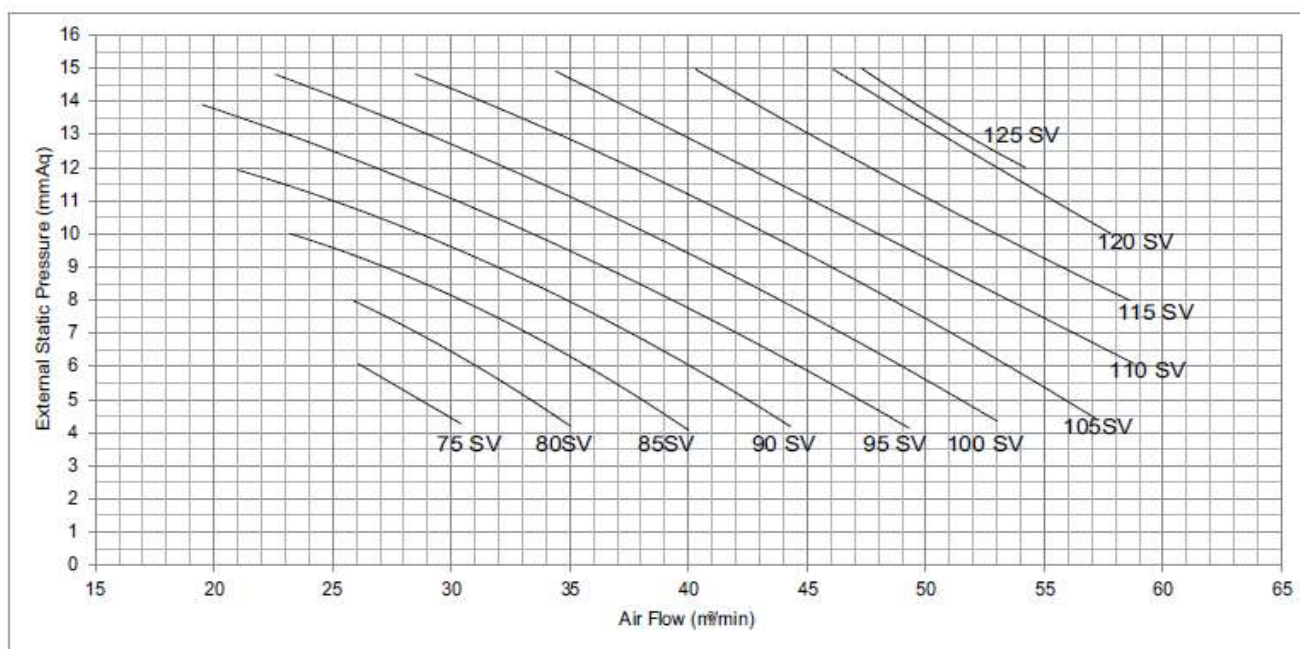

Setting value (SV) = nastavená hodnota na dálkovém ovladači

Static Pressure = ext. statický tlak (mm vod. sloupce / Pa)

**Hodnoty množství vzduchu jsou uváděny v m³/min (Air Flow / CMM)**