


## MULTI V – kanálové jednotky středotlaké

### Statický externí tlak + množství vzduchu

#### ARNU42GM2A4

Postup stanovení množství vzduchu viz předchozí strany.

SV (Setting Value)	Static Pressure (mmAq(Pa))							
	4(39)	6(59)	8(78)	10(98)	12(118)	14(137)	16(157)	18(176)
Air Flow Rate (m³/min)								
90	22.99	-	-	-	-	-	-	-
95	25.9	19.14	-	-	-	-	-	-
100	28.62	23.32	-	-	-	-	-	-
105	31.44	26.38	19.58	-	-	-	-	-
110	34.21	29.92	24.18	-	-	-	-	-
115	36.61	32.67	28.77	21.67	-	-	-	-
120	39.17	35.70	31.77	26.24	19.60	-	-	-
125	41.73	38.47	34.76	30.80	24.29	-	-	-
130	44.03	41.24	37.73	34.08	28.98	22.3	-	-
135	-	43.78	40.70	37.35	32.57	27.5	20.49	-
140	-	-	43.47	40.39	37.2	32.60	25.76	19.85
145	-	-	-	43.43	41.6	37.4	30.71	24.60
150	-	-	-	-	43.4	42.3	35.37	29.36
155	-	-	-	-	-	43.7	37.52	32.71

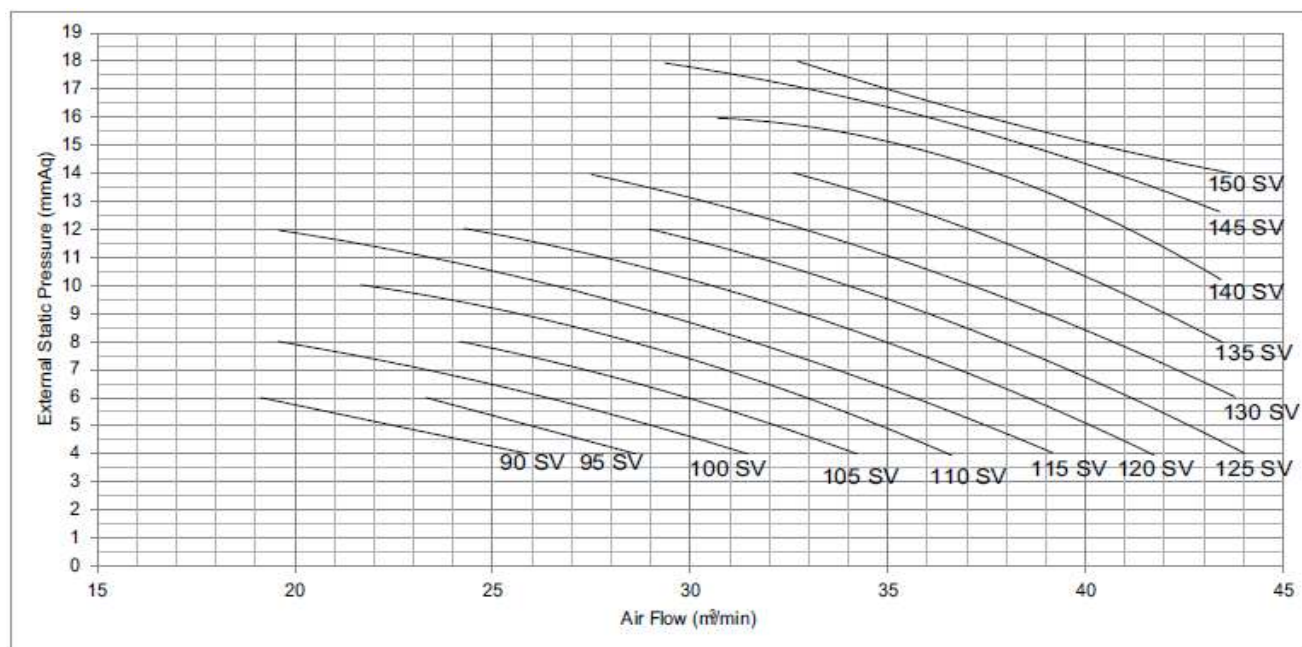

Setting value (SV) = nastavená hodnota na dálkovém ovladači

Static Pressure = ext. statický tlak (mm vod. sloupce / Pa)

**Hodnoty množství vzduchu jsou uváděny v m³/min (Air Flow / CMM)**